

SHADOWSPEC SERENITY™ PRECISION ENGINEERED AMBIENCE

BEST-IN-CLASS WARRANTY

Relax easy knowing your outdoor umbrella purchase is protected by the industries best warranty and customer support.







Frame Warranty



Trusted for over 25 years

SHADOWSPEC SERENITYTM ROTATING CANTILEVER UMBRELLA

PATENT-PENDING TECHNOLOGY

SHADOW**LIFT**™



Gas-assisted, anti-gravity, easy lift. Shadowlift[™] is the most advanced umbrella deployment system in the industry. Lift your world of shade with ease.

SHADOW**GLIDE**™



Using calculated geometry and expert engineering the sliding mechanism works in complete harmony to open or close your umbrella in 3 seconds.

SHADOW**HUB**



Our flagship umbrellas have built in LED lights in the central hub. Controlled with an optional, rechargeable, smart battery and phone app.

SHADOW**LOCK**™



Integrated into the mast of the umbrella, Shadowlock[™] is a functional solution to windprotection and 360 degree umbrella rotation.

A New Class of Shade.

The Serenity[™] has been crafted with premium-grade aluminium and stainless steel to give you an umbrella that stands up and stands out. Every component has been designed and engineered to survive in the wild. There's no internal moving parts, or cables to break and best of all, no antiquated crank handles. We've perfected the art of modular shade with the Serenity[™]. Rotate your way to perfect shade with our exceptional designs. You'll continue to be inspired by our smart, modern and modular outdoor shade umbrella. Our needle-shifting features get better with every open and every new discovery of innovation.



Canopy Options

Features

- 100% Sunbrella™ Marine solution-dyed fabric
- All fabrics can be cleaned, washed and are replaceable
- UV & Fade Resistant
- 10 year Sunbrella™ warranty
- Mould and Mildew Resistant
- Weight: 314 g/m2
- Sun protection Skin Cancer Foundation's seal of approval



Stock Colour Options

non-stock colour option.





Trend Colours Summer 19/20*



*Trend colours are non-stock and lead times may vary for non-stock colours.

Size & Configuration







3.0m / 9'10"

In-Ground Anchor

footing.



3.5m / 11'6"



Mounting Options

Surface Plate

For deck, patio and concrete mounting.

а. . а н а



For mounting with a concrete

Wall Fixings For when ground mounting isn't possible.




Free-standing Base

For complete customised maneuverability.



Pavers are required for ballast and are not supplied. *Optional castor wheels shown*.

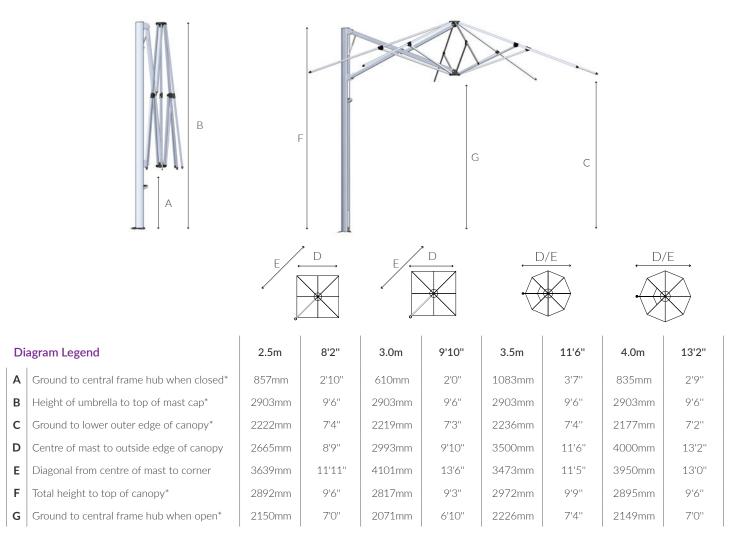

*Portable Base installations will add 165mm to these measurements. Adding portable base wheels also will add a further 45-80mm/2-3". All sizings are +/- 2.5mm / 3/2" and subject to change without notice.



143 St Vincent Street, Nelson, NZ 03 546 6809 sales@tmcovers.co.nz www.tmcovers.co.nz

In partnership with

